

KEY FEATURES

- **PROPRIETARY BLEND OF COROSEX® AND CALCITE® MEDIAS**
- **CONTROLS pH CORROSION, AND ALLOWS MINERALIZATION**
- **PRE-TREATMENT OF RESIDENTIAL AND COMMERCIAL WATER**

CALCOR NEUTRALIZATION

Aries FilterWorks Calcor Neutralization Cartridges are designed with a proprietary blend of Corosex® and Calcite®. The basic benefit of using Corosex® is that it dissolves much faster than Calcite®. If the initial pH is less than 6.0, Calcite® alone does not dissolve fast enough to correct pH to neutral. Blending the products, allows the pH to be corrected over a more effective range. Aries Calcor Cartridge specific blend helps to create a balanced product that will deliver a natural effluent without the negative impact of over correction.

APPLICATIONS

COMMERCIAL USE -

Water can behave in a corrosive manner, which is a problem that needs to be considered during water treatment. Aries Calcor cartridges can be used to polish RO effluents and mineralize the product stream back to a balanced and healthy pH.

RESIDENTIAL USE -

If your water has a pH of < 7.0 it is considered acidic and it should be treated. With respect to the corrosion potential of drinking water, the primary concerns include the potential presence of toxic metals as well as deterioration and damage to the household plumbing. The pretreatment system typically used in applications for homeowners or small private water supplies should include a neutralizing filter. The combination of calcor and carbon is used for an added benefit of improving taste and odor in the same cartridge.

ABOUT CALCOR NEUTRALIZATION

pH is an indicator of the acid or alkaline condition of water. The pH scale ranges from 0-14; 7 indicates the theoretical neutral point. Neutralization cartridges act on acidic waters by slowly dissolving the calcium carbonate and magnesium oxide media as the water flows through the filter, raising the pH of the water and increasing the alkalinity. This eliminates the effects of corrosive water and can help to prevent corrosion of piping and fixtures.

The combination of Corosex® and Calcite® lessen the aggressive tendencies of acidic pH streams and their ability to leach metals from plumbing systems acidifier. Initial effluent may have a somewhat higher dissolution of product as it sits in intimate contact over time. The dissolution rate is multi-factorial and the result of water temperature, flow rate and specific water chemistry. This product is sacrificial so capacities will be specific to each application and variables mentioned above.

FEATURES & BENEFITS

- **USE OF COROSEX® AND CALCITE®**
Allows pH to correct over an extended range
- **USE OF RESINTECH® PREMIUM FINE MESH CARBON STANDARD**
Optimum mesh size provides more surface area to enhance organic adsorption and chlorine conversion
- **FITS STANDARD RESIDENTIAL AND INDUSTRIAL SIZE HOUSINGS**
AF Series cartridges are double-open end cartridges that fit standard residential and industrial housings
- **OVERSIZED CARTRIDGE FOR MAXIMUM MEDIA FILL**
AF Series cartridges have up to 50% higher capacity and extend cartridge life, due to the use of larger cartridges
- **QUALITY PRODUCED AND MADE IN THE USA**
Cartridges are produced by Aries FilterWorks, a division of ResinTech®. Strict quality control over all aspects of cartridge and media production allows complete traceability of every filter




COMPONENT

AF SERIES - CALCOR /CARBON

TECHNICAL DATA

	10" SLIM	20" SLIM	10" SUPER BLUE	20" SUPER BLUE
Diameter (in.)	3.0"	2.9"	4.6"	4.6"
Length (in.)	9.9"	20.0"	10.0"	20.0"
Temperature (°F.)				
Min.	40°	40°	40°	40°
Max.	100°	100°	100°	100°
Pressure (psi)				
Min.	20	20	20	20
Max.	125	125	125	125
Micron Rating (μ)	25	25	25	25
Materials of Construction				
1. Gasket	TPE	TPE	TPE	TPE
2. End Caps	PP	ABS	ABS	ABS
3. Pads	PE	PE	PE	PE
4. Body / Tube	PP	ABS	ABS	ABS
5. Media ResinTech® Premium Acid Washed Coconut Shell Carbon				
6. Media Calcor pH Neutralization Media				
PP	Polypropylene		PE	Polyester
ABS	Acrylonitrile Butadiene Styrene		TPE	Thermoplastic Elastomer

CALCOR DELTA P

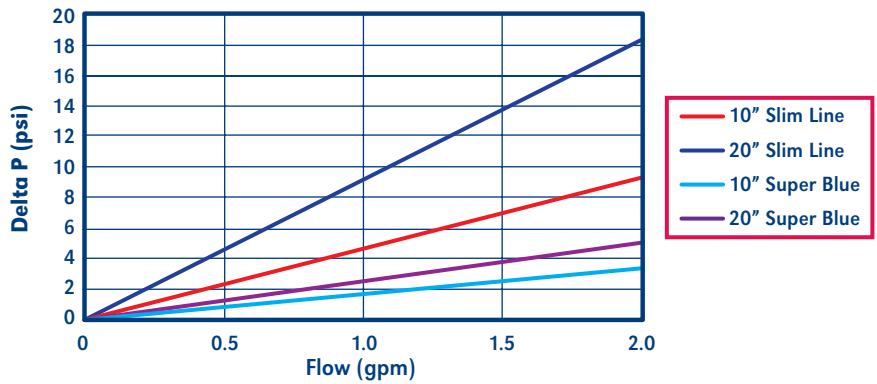


MEDIA

As a division of ResinTech, Inc.®, Aries FilterWorks is the only integrated water filtration media and cartridge manufacturer providing a premium product at the most competitive cost. Aries builds technology and knowledge of ion exchange and specialty adsorbents into each cartridge. Strict quality control over all aspects of cartridge production allows complete traceability of every filter.

ORDERING GUIDE

PART NUMBER	MEDIA	STANDARD HOUSING DIAMETER X LENGTH	SERVICE FLOW RATE (GPM)	CAPACITY (GALLONS)
AF-10-4210	50% Resintech	2.5" x 10"	0.5	2,000
AF-20-4210	Premium CS	2.5" x 20"	1.0	4,500
AF-10-4210-BB	AGC 50-AGW	4.5" x 10"	1.5	6,500
AF-20-4210-BB	50% Calcor pH Neutralization Media	4.5" x 20"	3.0	15,000

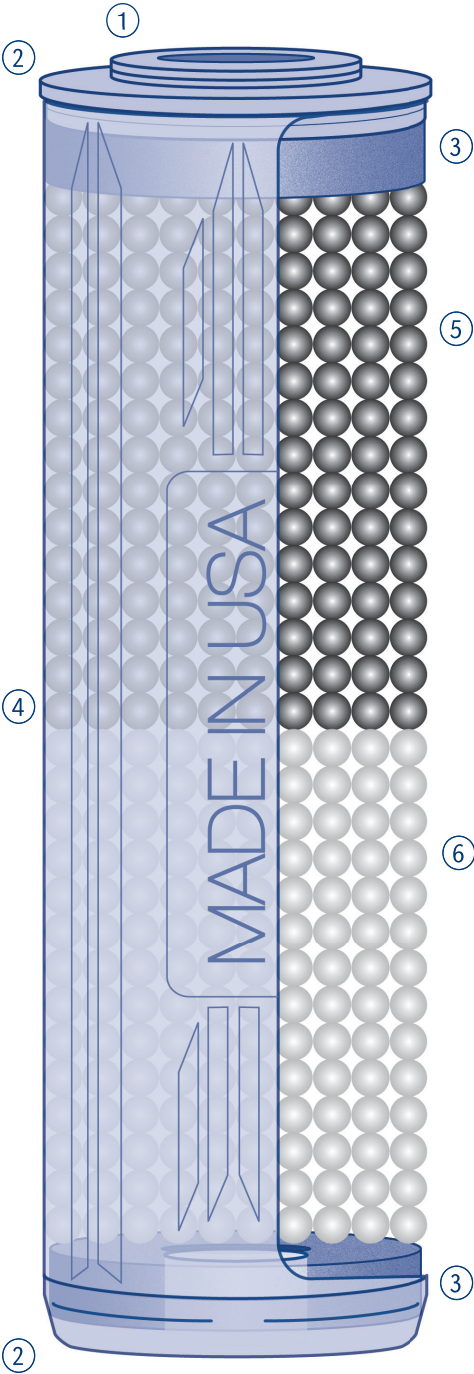

COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only.
Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.



The Grainstore • Elmhurst Business Park • Lichfield • WS13 8EX • UK Call: - 0121 796 6450 • Email: - enquiries@resin-products.com

IMPORTANT NOTICE TO USER:

DS-AFCalcor/Carbon -rev1.0

The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.