



## Domestic equipment New Compact

Ref.	Description	£/uni.
NW1020	R.O. new compact equipment	
NW1021	R.O. new compact equipment with pump	

### Features:

- 50 GPD membrane
- Working pressure: 3 kg/cm<sup>2</sup>
- Booster pump (in equipment with pump)
- Input / output voltage: 220V - 50Hz
- Inlet connection: 1/4"
- Outlet connection: 1/4"
- Salt rejection: 97%
- 5 microns sediment prefilter
- Activated carbon prefilter: GAC + GAC
- GAC carbon post-filter
- Ceramic valve faucet
- Tank capacity: 5,5 liters
- Production: 110 liters / day
- Test conditions: 500 ppm
- Dimensions:
  - Equipment: 420 x 250 x 420 mm

High pressure pump (optional)

Safety Fittings with quick connection.

External transformer.


1/4" Assembling a 1/4 for reliability.

5 stages filtration.

Double O-ring for safety.

Ceramic valve faucet.

NSF certification tube.

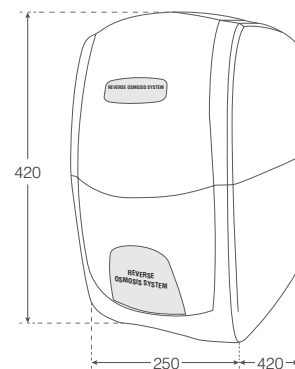

\* Approximate dimensions in mm

## Accessories

Ref.	Description	£/uni.
FCS101	Inline sediment cartridge	1 unit
FCC101	Inline activated carbon cartridge	2 units
FP1001	Inline post-carbon cartridge	1 unit
RO5006	Booster pump 50-75 GPD	
RO5007	24V transformer	
DO1002	2,2gl pressurized tank	
RO4015	50 GPD Vontron membrane	1 unit

